

Fuel Infrastructure Costs: electricity vs. hydrogen

Electricity outlet fuel infrastructure. "Type I" 120 V conventional home outlets would not be sufficient to charge most BEVs or PHEVs. As summarized in Table 1, it will take between 10 to 28 hours¹ to charge car batteries using only a standard 120 V outlet. Most car owners will need access to at least a Type II 240-Volt outlet, if not a Type III fast charging system to refuel their battery electric vehicles (BEVs) or plug-in hybrid electric vehicles (PHEVs) in a reasonable period of time.

Table 1 Estimated charging times for BEVs and PHEVs

	Nominal AER range (miles)	EPA rated range (miles)	Charging time (hours)		
			Type I 120 Volt	Type II 240 Volt	Type III 480+ volt
Nissan Leaf BEV	100	73	16	8	80% in 1/2 hr
Chevy Volt PHEV	40	?	10	4	
Ford Focus BEV	≈100	?	18 to 20	3 to 4	??
Mitsubishi MiEV	83		22.5	6	80% in 1/2 hr
Toyota RAV4 BEV prototype*	100	?	28	12	

*Toyota assures reporters that the production RAV4 will have shorter charging times

BEVsoutlet cost, charging times.XLS; WS 'charging times' F10 5/10/2011

When we first began modeling the costs of installing electrical outlets for BEVs and PHEVs, we used data published by the Idaho National Laboratory². They estimated that a Type II residential outlet would cost between \$1,250 and \$2,146 each, based on average residential costs for installing a 240-V outlet.

But actual real-world costs were estimated at \$8,043 per Type II outlet based on installing 4,600 outlets for \$37 million (including \$15 million of government funds) by Coulomb Technologies, and \$18,400 per Type II outlet for a price of \$4.6 million (including \$2.6 million government money) to install 250 outlets in Hawaii³. But since these "costs" were heavily subsidized by the government, they may not reflect actual costs, but may be the prices that the contractor could charge and still win the job.

In addition, Coulomb Technologies in their annual merit review to the DOE stated that residential customers have to pay for installation of the Type II outlets, so the \$37 million project cost does not

¹ The 38-hour estimated is for an early *prototype* of the Toyota RAV4 BEV made in conjunction with Tesla Motors; but Toyota has assured reporters that the production version of the RAV4 will be charged more quickly. See Jana Hartline "Advanced Technology Vehicle Overview," presented at the Toyota Sustainable Mobility Seminar, La Jolla, California, available at: http://www.toyota.com/esg/pdf/2011_SMS_Hartline&Soto.pdf, April 4, 2011.

² K. Morrow, D. Karner, & J. Francfort, "The U.S. Department of Energy Vehicle Technologies Program-Advanced Vehicle Testing Activities- Plug-in Electric Vehicle Charging Infrastructure Review," Battelle Energy Alliance Contract No. 5/8517, Report # INL/EXT-08-15058, November 2008. Available at: <http://avt.inel.gov/pdf/phev/phevInfrastructureReport08.pdf>

³ See <http://www.mauiveekly.com/page/content.detail/id/502980/Federal-funds-used-for-charging-systems.html?nav=17>

Fuel Infrastructure Costs: electricity vs. hydrogen

include all installation charges. If we assume a 50/50 split between residential and public outlets, then this would add another \$2.76 million to the price tag⁴, raising the average outlet cost to \$8643/BEV⁵.

ECotality also reported on their project to install 14,000 Type II outlets to support 8,300 BEVs for a total cost of \$230 million, of which \$114.8 million came from Federal Recovery (ARRA) funds⁶.

This works out to \$16,429 per outlet or \$27,711 per BEV supported⁷.

Table 2 Prices charged by ECotality for their EV project for Type II BEV charging outlets

The EV project by ECotality					
	Total Costs	Number of outlets	Cost per outlet	Number of BEVs supported	Cost per BEV
government	\$ 114,800,000				
Industry	\$ 115,200,000				
Total	\$ 230,000,000	14,000	\$ 16,429	8,300	\$ 27,711

BEVs outlet cost, charging times.XLS; WS 'ECOTALITY' i 11 5/17 /2011

Table 3. Summary of estimated BEV & HEV outlet costs

	Voltage	Current	Max Power (kW)	Electrification Coalition	Idaho National Laboratory	Average of Three bids to retrofit 300-car Boulder Parking Garage[1]	Coulommb Technologies [2]	Hawaii Outlets [3]	ECotality [4]	BC Hydro [5]
Type I Residential	120	20	1.9		\$833 to \$878					
Type II Residential	240	40	7.7	\$500 to \$2,500	\$1,250 to \$2,146		\$ 8,643.48	\$ 18,400	\$ 27,711	\$2,272
Type II Public	240	40	7.7			\$12,400			\$ 27,711	\$12,875
Type III Public	480	??	??	\$25,000 to \$50,000		\$106,000				\$64,158
[1] Engineering contractor bids to retrofit Boulder, Colorado Parking Garage obtained by Kreider & Associates, LLC										
[2] Based on a price of \$37 million (\$15 million government funds) to install 4,600 Type II outlets										
[3] Based on a price of \$4.6 million (\$2.6 million government funds) to install 250 outlets.										
[4] Based on a price of \$230 million [\$114.8 million government funds] to support 8,300 BEVs										
[5] Electric Transportation Engineering Corporation for BC Hydro and Natural Resources Canada										

BEVsoutlet cost, charging times.XLS; WS 'Outlet costs' J 12 6/5/2011

Kreider and Associates obtained three firm contractor bids⁸ to modify an existing 300-car parking garage in Boulder, Colorado with 10% Type III chargers and 90% Type II outlets⁹. The average of these three bids to retrofit an existing parking garage were \$12,400 for each Type II outlet and \$106,000 each for

⁴ 2,300 residential installations at \$1,200 each.

⁵ \$39.76 million/ 4,600.

⁶ See: <http://www.businesswire.com/news/home/20110516005772/en/ECotality-Completes-Installation-1000-Blink%C2%AE-Level-2>

⁷ The Electrification Coalition recommended that two outlets be installed for every BEV initially to overcome “range anxiety;” it appears that ECotality used a 1.7 ratio of outlets to BEVs in their EV project.

⁸ Dr. Jan F.. Kreider, Kreider & Associates, Boulder, Colorado, presented to the *Toyota Sustainable Mobility Seminar*, La Jolla, California, April 6, 2011, Available at: http://www.toyota.com/esg/pdf/11_SMS_Kreider.pdf

⁹ These are costs to retrofit an existing parking garage, so costs for new facilities should be less. However, most charging outlets will undoubtedly be placed in existing facilities, so these costs may be representative of real-world costs.

Fuel Infrastructure Costs: electricity vs. hydrogen

the Type III charger. These are probably the most accurate estimates of electrical infrastructure costs since they are based on competitive bids without any government subsidies.

Some BEV supporters have refuted these costs as excessive, noting that a Type 2 outlet (“EVSE”)¹⁰ can be purchased for under \$3,000. This may be true, for example, a Canadian group¹¹ has documented the full costs of installing a Type 2 outlet; the EVSE costs only \$2,460, but the total costs of installing the full system adds up to \$12,875 per pedestal with two outlets. Their detailed costs estimates shown in tables 4 & 5 for type 2 and for type 3 fast chargers in Tables 4 & 5.

Table 4 Estimated cost components for installing a Type 2 public pedestal with two outlets from the Electric Transportation Engineering Corporation of Canada¹¹.

Public Charge Station - Level 2 (Qty 2)			
Description	Quantity	Cost, Ea	Total
Labour (hrs)			
Consultation with Property Owner/Tenant	4	\$ 75.00	\$ 300.00
Initial Site Visit	2	\$ 75.00	\$ 150.00
Engineering Drawings	16	\$ 90.00	\$ 1,440.00
Permit Application / Acquisition	2	\$ 75.00	\$ 150.00
Installation	24	\$ 75.00	\$ 1,800.00
Approval	2	\$ 75.00	\$ 150.00
Labour Sub-Total			\$ 2,930.00
Materials			
Distribution Sub-Panel (100Amp)	1	\$ 250.00	\$ 250.00
EVSE - 40Amp	2	\$ 750.00	\$ 1,500.00
EVSE Pedestal	2	\$ 450.00	\$ 900.00
40amp Breaker	2	\$ 35.00	\$ 70.00
#12 THHN Wire	400	\$ 0.30	\$ 120.00
Conduit - 3/4 EMT	100	\$ 3.00	\$ 300.00
40Amp Fused Disconnect	2	\$ 115.00	\$ 230.00
Ground Signage & Striping (painted)	2	\$ 125.00	\$ 250.00
Signage (Post Mount)	2	\$ 250.00	\$ 500.00
Miscellaneous	2	\$ 60.00	\$ 120.00
Material Sub-Total			\$ 4,300.00
Trenching & Repair	100	\$ 45.00	\$ 4,500.00
Permit	1	\$ 85.00	\$ 85.00
		Total	\$ 12,875.00

¹⁰ EVSE = “Electric vehicle supply equipment,” the actual pedestal that includes the electrical outlet.

¹¹ *Electric Vehicle Charging Structure Deployment Guidelines*, by Electric Transportation Engineering Corporation for BC Hydro and Natural Resources Canada, Version 1.0, July 2009 available at: http://www.bchydro.com/etc/medialib/internet/documents/environment/EVcharging_infrastructure_guidelines09.Par.0001.File.EV%20Charging%20Infrastructure%20Guidelines-BC-Aug09.pdf

Fuel Infrastructure Costs: electricity vs. hydrogen

Similarly, Table 5 shows the costs for a Type 3 rapid charger. The EVSE itself costs only \$53,500, but the total installation costs are estimated at \$64,158. Note also that this Type 3 “fast charger” is only 30 kW, while the Kreider estimates were for Type 3 chargers up to 200 kW.

Table 5. Estimated costs for installing a Type 3 30-kW fast charger with two outlets

Public Charge Station - Level 3 (Qty 2-30kW)			
Description	Quantity	Cost, Ea	Total
Labor (hrs)			
Consultation with Property Owner/Tenant	16	\$ 75.00	\$ 1,200.00
Initial Site Visit	4	\$ 75.00	\$ 300.00
Engineering Drawings	24	\$ 90.00	\$ 2,160.00
Permit Application / Acquisition	4	\$ 75.00	\$ 300.00
Installation	24	\$ 75.00	\$ 1,800.00
Approval	4	\$ 75.00	\$ 300.00
Labor Sub-Total			\$ 4,860.00
Materials			
Distribution Sub-Panel (480VAC/3Phase)	1	\$ 650.00	\$ 650.00
Fast Charger (30kW)	2	\$ 25,000.00	\$ 50,000.00
Point of Sale System	1	\$ 2,500.00	\$ 2,500.00
60amp 480VAC/3Pole Breaker	2	\$ 45.00	\$ 90.00
#6 THHN Wire	160	\$ 0.30	\$ 48.00
Conduit 1"	50	\$ 3.50	\$ 175.00
60Amp Fused Disconnect	2	\$ 150.00	\$ 300.00
Ground Storage & Striping (painted)	2	\$ 125.00	\$ 250.00
Signage (Post Mount)	1	\$ 2,800.00	\$ 2,800.00
Miscellaneous	1	\$ 350.00	\$ 350.00
Material Sub-Total			\$ 58,213.00
Trenching & Repair	30	\$ 60.00	\$ 1,800.00
Concrete Work	1	\$ 1,500.00	\$ 1,500.00
Permit	1	\$ 95.00	\$ 95.00
		Total	\$ 64,158.00

The Electrification Coalition, a group of organizations supporting the development and deployment of BEVs and PHEVs (which they call “GEVs” for Grid Enabled Vehicles), have recommended that governments and utilities install two Type II outlet stations initially for each GEV sold to overcome “range anxiety” on the part of prospective GEV buyers¹². In that case, the cost electricity infrastructure

¹² *Electrification Roadmap: Revolutionizing Transportation and Achieving Energy Security*, by the Electrification Coalition, released November 15, 2010, available at <http://www.electrificationcoalition.org/>

Fuel Infrastructure Costs: electricity vs. hydrogen

would be at least **\$24,800 to \$27,500 per BEV** or PHEV, or \$27,711 per BEV using the ECotality prices and 1.7 outlets per BEV.

Hydrogen fueling infrastructure. For comparison, some hydrogen fueling stations for fuel cell electric vehicles (FCEVs) will cost millions of dollars, but, since FCEVs can be refueled in quickly (the average fueling time for 28,000 high pressure hydrogen fueling events for 155 FCEVs that traveled over 3 million miles monitored by DOE was 4.4 minutes)¹³ each station can fuel thousands of FCEVs. For example, the Institute for Transportation Studies at the U. of California at Davis¹⁴ based on industry cost data, estimates that the cost for a 1,000 kg/day station is approximately \$5.1 million, but this station could support 2,112 FCEVs¹⁵, or a cost of **\$2,432 per FCEV**. The DOE's H2A detailed modeling¹⁶ of hydrogen fueling stations estimates that a larger capacity station producing 1,500 kg/day of hydrogen would cost \$4.71 million, but this larger station could support 3,169 FCEVs or a cost of **\$1,486 FCEV**.

The hydrogen infrastructure cost data are summarized in Table 6 for a variety of fueling station options; all data are from UC-Davis⁸ unless otherwise specified.

Table 6. Estimated cost of hydrogen fueling infrastructure per FCEV supported and average cost of hydrogen in \$/gallon of gasoline on a range-equivalent basis

Hydrogen infrastructure cost per car					Hydrogen fuel cost (\$/gge:gallon of gasoline on a range-equivalent basis)		
VMT/year	11800				Average f.e. gain:	1.93	
FCEV f.e.	#####	0.47kg/day			HEV f.e./ICV f.e.	1.45	
Today-UC-davis					FCEV f.e./ICV f.e.	2.4	
					HEV %	50%	
Station Type	kg/day	FCEVs supported	Installed Cost(\$M)	Cost per FCEV & total cost for 1 M FCEVs (\$M)	Average \$/FCEV	Hydrogen Cost (\$/kg)	Hydrogen range-equivalent Cost (\$/gge)
Mobile refueler	10	21	0.243	\$ 11,571		\$31.0/kg	\$16.3/gge
SMR	100	211	1.048	\$ 4,967		\$13.0/kg	\$6.8/gge
SMR	113	238	1.078	\$ 4,529		\$12.3/kg	\$6.5/gge
SMR	480	1,014	2.740	\$ 2,702		\$4.5/kg	\$2.4/gge
SMR	565	1,193	3.088	\$ 2,588	\$ 3,201	\$7.0/kg	\$3.7/gge
SMR	1000	2,112	5.137	\$ 2,432	\$ 4,038	\$6.5/kg	\$3.4/gge
LH2 station	1000	2,112	2.697	\$ 1,277		\$7.2/kg	\$3.8/gge
HTFC energy station	91	192	1.345	\$ 7,005		\$4.9/kg	\$2.6/gge
DOE-H2A-SMR	1500	3,169	4.71	\$ 1,486		\$3.39/kg	\$1.8/gge
Current-NRC/NAS-SMR	480	1,014	1.848	\$ 1,822		\$3.5/kg	\$1.8/gge
Future-UC-Davis SMR	480	1,014	1.458	\$ 1,438	\$ 1,191	\$4.3/kg	\$2.3/gge
Future-NRC/NAS	480	1,014	0.957	\$ 944		\$2.3/kg	\$1.2/gge

Average Hydrogen Cost (\$/gge)

Average: \$3.64/gge

Average: \$4.91/gge

\$1.74/gge

BEVs outlet cost, charging times.XLS: WS 'H2 cost per car' N 22 9/1/2011

SMR = steam methane reforming (Making hydrogen from natural gas and water); LH2 = liquid hydrogen supplied to the station by tanker truck; HTFC = high temperature fuel cell, such as a molten carbonate fuel cell (MCFC) used to convert digester gas

¹³ Click on "monitoring" link at http://www.cleancaroptions.com/html/ev_fueling_time.html for the report by Keith Wipke, Sam Sprik, Jennifer Kurtz, & Todd Ramsden, "2011 Composite Data Products: National FCEV Learning Demonstration," NREL report presented to the Fuel Cell and Hydrogen Energy Association Conference, Washington, D.C., March 29, 2011.

¹⁴ *Jonathan S. Weinert & Timothy E. Lipman, "An Assessment of the Near-Term Costs of Hydrogen refueling stations and station components," Institute for Transportation Studies, U. of California at Davis, Final Report # UCD-ITS-RR-06-03, January 13, 2006; available at: <http://hydrogen.its.ucdavis.edu/research/track2/tr2pr1>

¹⁵ Assuming 11,800 miles per year and a FCEV fuel economy of 68.3 miles/kg of hydrogen (Toyota FCHV-adv.)

¹⁶ See this link for the DOE's H2A cost model case studies: http://www.hydrogen.energy.gov/h2a_prod_studies.html

Fuel Infrastructure Costs: electricity vs. hydrogen

from a waste water treatment plant to electricity, heat and hydrogen for fueling vehicles) H2A = the DOE's cost model for hydrogen systems. NRC/NAS = the National Research Council of the National Academies of Science)¹⁷

Conclusion: the infrastructure to support one million BEVs will cost on the order of \$24.8 Billion (assuming the Electrification Coalition's recommendation of two Type II 20-Volt outlets per BEV), or \$12.4 Billion if one public outlet per BEV is deemed adequate)

The average cost of a hydrogen infrastructure for one million FCEVs would be approximately \$3.2 billion initially (ignoring the initial mobile refueler option), dropping to \$1.19 Billion in the future according to the UC-Davis and NRC estimates. Note that the estimated average cost of hydrogen would be \$3.64/gge initially, falling to \$1.74/gge in the future¹⁸.

Conclusion: the electrical outlet infrastructure for BEVs may cost between 4 and 20 times more than the cost of a hydrogen infrastructure!

This is consistent with the McKinsey & Company analysis of alternative vehicles for the EU¹⁹, where they concluded that electrical infrastructure would cost 5.3 times more than hydrogen infrastructure, as shown in Figure 1.

¹⁷ "Transitions to Alternative Transportation Technologies – A Focus on Hydrogen," by the Committee on Assessment of Resource Needs for Fuel Cell and Hydrogen Technologies, by the National Research Council of the National Academies, National Academy Press, Washington, D.C., 2008, available at:

http://books.nap.edu/openbook.php?record_id=12222&page=R1

¹⁸ These costs in \$/gge represent the cost of hydrogen such that the owner of a FCEV would pay the same fuel cost per mile as the owner of a gasoline vehicle [assuming a 50/50 mix of HEVs and non-hybrid gasoline cars] with gasoline at the stated price.

¹⁹ For a summary of the McKinsey report, see:

http://www.cleancaroptions.com/McKinsey_EU_Report_key_points.pdf

The full McKinsey report "A Portfolio of power-trains for Europe: a fact-based analysis- the Role of battery electric vehicles, plug-in hybrid electric vehicles and fuel cell electric vehicles" can be downloaded from <http://www.now-gmbh.de/die-now/publikationen/studie-entkarbonisierung-individualverkehrs.html>

Fuel Infrastructure Costs: electricity vs. hydrogen

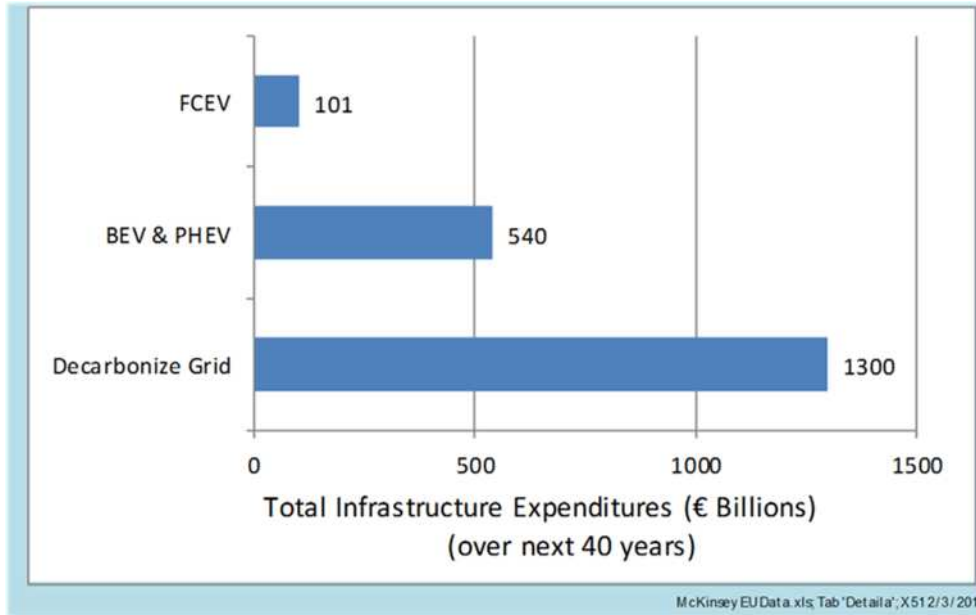


Figure 1. Estimated cumulative costs over 40 years for electrical infrastructure for PHEVs and BEVs and hydrogen infrastructure for FCEVs estimated by McKinsey & Company for the EU.

From another perspective, consider how many hydrogen fueling stations could be built with the \$230 million spent on the EV infrastructure project to support 8,300 PHEVs or BEVs:

Station Type	kg/day	FCEVs supported	Installed Cost(\$M)	Number of H2 Stations for \$230M	Number of FCEVs supported by \$230M
Mobile refueler	10	21	0.243	947	19,996
SMR	100	211	1.048	219	46,366
SMR	113	239	1.078	213	50,935
SMR	480	1,014	2.740	84	85,124
SMR	565	1,194	3.088	74	88,906
SMR	1000	2,113	5.137	45	94,591
LH2 station	1000	2,113	2.697	85	180,168
HTFC energy station	91	192	1.345	171	32,876
DOE H2A SMR	1500	3,169	4.71	49	154,750
Current-NAS SMR	480	1,014	1.848	124	126,211
Future-UC-Davis SMR	480	1,014	1.458	158	159,972
Future-NAS	480	1,014	0.957	240	243,719

BEVsoutlet cost, charging times.XLS; WSH2 for \$230M; F 18 5/ 17/2011

Thus for \$230 million we could install between 49 to 171 regular hydrogen fueling stations, or up to 947 of the hydrogen mobile refuelers. These stations could support between 33,000 and 180,000 FCEVs,

Fuel Infrastructure Costs: electricity vs. hydrogen

with an average of 95,000 FCEVs supported with \$230 million in infrastructure funding (excluding the mobile refuelers), compared to only 8,300 BEVs or PHEVs supported by this same expenditure. In other words, \$230 million would support an average of 11.5 times more FCEVs than BEVs!